



## Mynute VHE

High efficiency  
open vent boiler

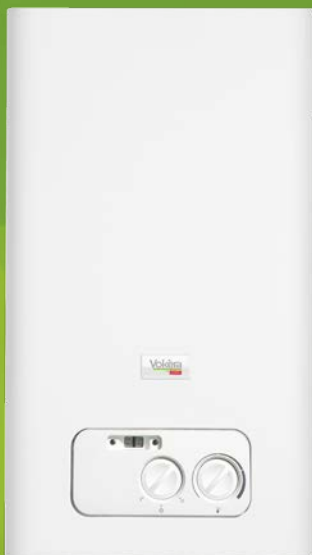

MYNUTE 15 VHE

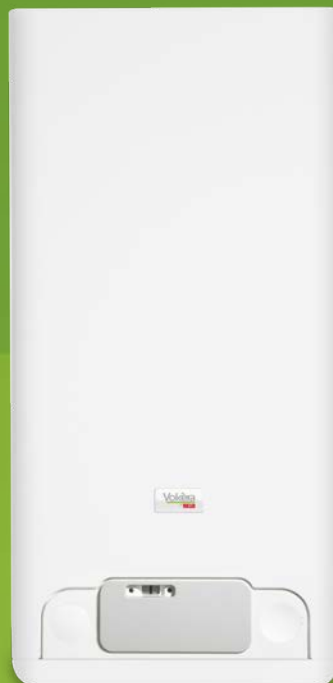

MYNUTE 20 VHE


- RANGE 15VHE - 20VHE ■
- ErP CLASS A ■
- 2 YEAR WARRANTY ■
- REAR FLUE OPTION ON 15VHE ■
- TOP AND BOTTOM PIPE CONNECTIONS ■

# Mynute VHE

## Open vent boiler

### Dimensions and Clearances (mm)

\*From casing or 25mm above flue elbow (whichever is applicable)

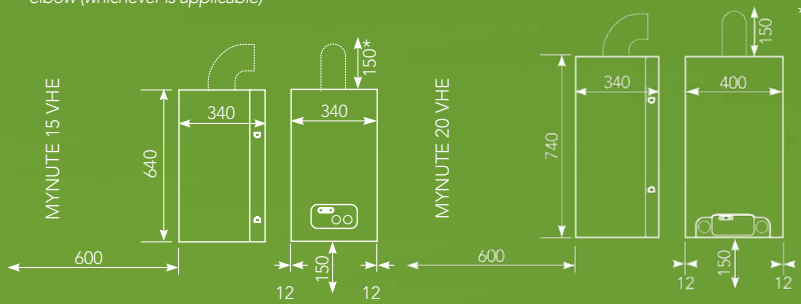

- Fully compliant with the Energy-related Products Directive.
- 2 year parts and labour warranty.<sup>(1)</sup>
- Vokera's unique radial design heat exchanger utilises an extruded aluminium alloy. The design and large cross-sectional area eliminate the risk of scaling or superheated areas.
- Low pressure loss reduces noise and increases pump performance.
- Simple commissioning; only minimal adjustments are required after installation and automatic modulation eliminates the need to range rate the boiler.
- Top and bottom pipe connections on Mynute 15VHE for flexibility and ease of installation.
- Low NOx - Class 5 performance.
- Only requires one metre minimum static head.
- Anti-cycling control reduces on/off cycling, increasing efficiency of the boiler and reducing fuel costs.
- Built-in frost protection, which protects the appliance from damage during periods of cold weather. External pump must be connected directly to the boiler to ensure this function operates.
- Versatile, horizontal, vertical or rear flueing options enable the boiler to be sited almost anywhere in the home. \* Flue type certification also permits Mynute VHE to be used with Vokera's 80mm PP flexible flue liner and B23 applications.
- Anti-seize function protects the pump from sticking during long periods of inactivity.
- Standard Autostop disabling function<sup>(2)</sup> that automatically changes the current operating mode and moves it permanently into the standby mode, helping Registered Social Landlords fulfill their legal obligation of an annual gas safety check.
- Intuitive control panel ensures end users can easily operate and adjust the appliance.
- Purge cycle feature. The boiler will automatically run a two minute purge cycle when the boiler is switched on for the first time before the burner ignites to expel any air that may be present in the system.
- Compatible with Vokera's MCS accredited Zenith solar thermal collectors and Aquaflo unvented single and twin coil cylinders.

\*The Mynute 15VHE can also be rear flued

<sup>(1)</sup>Subject to registration and annual service. <sup>(2)</sup>Autostop activation device required.



ErP Compliant



2 Year Warranty<sup>(1)</sup>



Rear Flue



Cupboard Fit



Endorsed Product

SPECIFICATIONS	MYNUTE 15VHE	MYNUTE 20VHE
PRODUCT ORDER CODE	884	886
CENTRAL HEATING		
HEAT INPUT (kW)	15	20
MAXIMUM HEAT OUTPUT 60/80°C (kW)	14.6	19.7
MAXIMUM HEAT OUTPUT 30/50°C (kW)	15.7	21.2
DIMENSIONS		
HEIGHT (MM)	640	740
WIDTH (MM)	340	400
DEPTH (MM)	340	340
WEIGHT		
DRY WEIGHT (KG)	25	28
CONNECTIONS		
FLOW & RETURN		22MM
GAS		15MM
CONDENSATE		21MM
ELECTRICAL DATA		
VOLTAGE (V/Hz)		230/50
FLUE DETAILS (CONCENTRIC)		
MAXIMUM HORIZONTAL FLUE LENGTH 60/100MM		7.8M
MAXIMUM VERTICAL FLUE LENGTH 60/100MM		8.8M
MAXIMUM HORIZONTAL FLUE LENGTH 80/125MM		25M
MAXIMUM VERTICAL FLUE LENGTH 80/125MM	30M	25M
FLUE DETAILS (TWIN)		
MAXIMUM HORIZONTAL FLUE LENGTH (80MM/80MM)	40M/40M	40M/40M
MAXIMUM VERTICAL FLUE LENGTH (80MM/80MM)	40M/40M	40M/40M
EFFICIENCY		
ErP SEASONAL SPACE HEATING ENERGY EFFICIENCY (CLASS/%)	A/93	A/91
SAP 2009 EFFICIENCY (%)	89.3	88.8
NOX CLASS	5	5

### ACCESSORIES

DESCRIPTION	CODE
REAR FLUE TERMINAL (15kW ONLY)	533
TELESCOPIC FLUE TERMINAL	29450121
SPACING FRAME (20kW ONLY)	2359689
MAGNETIC FILTER	29450199
CONDENSE PUMP	404
WHITE PIPE COVER 400MM (20kW)	518
MYNUTE VHE LPG CONVERSION KIT	01005446

GET IN TOUCH

Vokera Limited, Borderlake House, Unit 7 Riverside Industrial Estate, London Colney, AL2 1HG

E: [enquiries@vokera.co.uk](mailto:enquiries@vokera.co.uk)

T: 0844 391 0999

W: [www.vokera.co.uk](http://www.vokera.co.uk)

F: 0844 391 0998

### WE ARE SOCIAL

