

Fuelsaver

Passive flue gas heat
recovery device



5 YEAR WARRANTY ■

REDUCE GAS CONSUMPTION ■


REDUCES CARBON EMISSIONS ■

LISTED ON PCDB AND VALIDATED FOR SAP 2009 ■

Fuelsaver

Passive flue gas heat recovery device

Dimensions

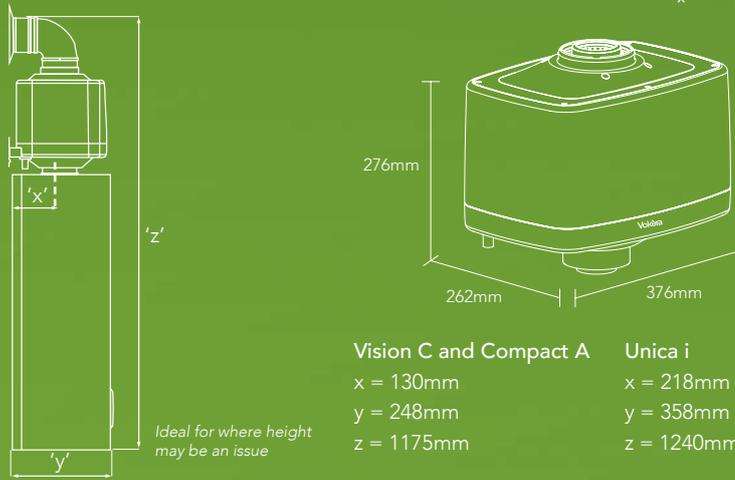


- 5 year parts and labour warranty.⁽¹⁾
- Gas consumption is reduced saving up to 33% of the gas normally required for DHW.
- Reduces carbon emissions by up to 500kg annually.
- Cold water wastage is significantly reduced by 5% annually due to the inlet water being pre-heated.
- Specifically developed to meet new build requirements with low water content ensuring optimum performance.
- Listed on PCDB and validated for SAP 2009 - helps to meet the requirements of higher levels of the Code of Sustainable Homes on new dwellings.
- Easy to install – low lift weight and adjustable wall bracket simplifies installation. Designed as a ‘bolt-on’ product, the Fuelsaver unit is secured to the wall and is connected directly to the appliance flue outlet. Thereafter the flue system is installed just as it would be in a normal installation.
- Extremely low temperature at flue outlet, virtually eliminates any nuisance plumbing.
- No separate condensate required as condensate fluid is collected and discharged via the boiler.
- Can be used on both horizontal and vertical flue configurations minimising impact on the siting of the installation.
- Compatible with Vokera’s 60/100mm concentric flue system.
- No moving parts eliminates the need for annual servicing or maintenance and permits silent operation.
- Compatible with weather compensation sensor to further improve efficiency.
- Compatible with other renewable technologies.
- Does not require any electrical supply so has zero parasitical energy consumption.

⁽¹⁾Subject to registration and annual service.

5 Year Warranty ⁽¹⁾	Gas Consumption Reduction	Carbon Emissions Reduction	LISTED ON PCDB AND VALIDATED FOR SAP 2009	Cold Water Waste Reduction	COMPATIBLE WITH UNICA I, VISION C & COMPACT A COMBI BOILER

SPECIFICATIONS	FUELSAVER
PRODUCT ORDER CODE	29450000
EFFICIENCY SAVINGS	
GAS SAVING	UP TO 33%
CARBON SAVING (ANNUAL)	UP TO 500KG
WATER SAVING (ANNUAL)	OVER 5%
DIMENSIONS AND WEIGHTS	
DIMENSIONS (H X W X D) (MM)	276 X 376 X 262
LIFT WEIGHT EMPTY (KG)	3.8
LIFT WEIGHT FULL (L/MIN)	15.6

Fuelsaver installation

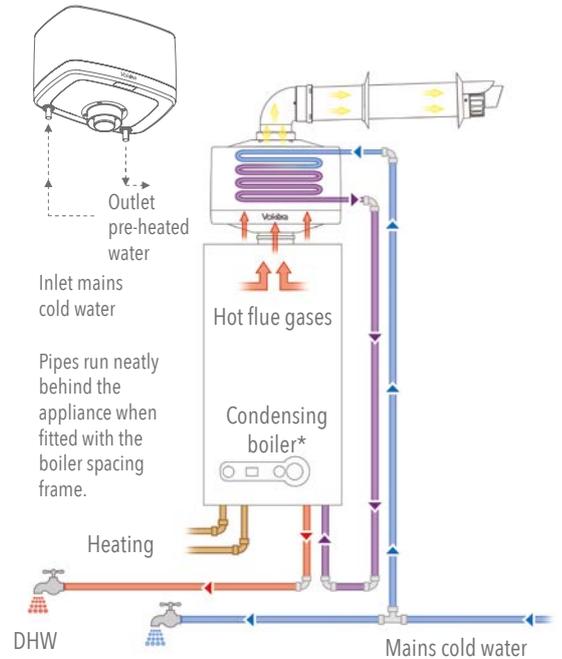

*Compatible with Vokera Unica i, Vision C and Compact A combi boilers.

FLUE OPTIONS AND ACCESSORIES

DESCRIPTION	CODE
BLENDING VALVE	1150529
TELESCOPIC FLUE TERMINAL	20131981
HORIZONTAL FLUE TERMINAL	20132063
VERTICAL FLUE TERMINAL	20131983

WE ARE SOCIAL

